

Application areas in sanitary facilities:

> Commercial buildings

- > Public buildings
- > Restaurants / Hotels

> Sports facilities





Subject to technical changes and version changes. Errors and omissions excepted. Date of publication: 08.17

Warm air hand dryer **WHT** Product information



	\diamondsuit
	WHT
Part number:	7000-70300
Colour:	pure white RAL 9010
Nominal power rating [kW]:	1.0
Supply voltage [1~ / N / PE 230 V AC]:	💮 with plug
Nominal current [A]:	4.3
Motor output [W]:	1000
Noise level [dB]:	69
Air flow [l/sec]:	38
Relative drying time [sec]:	арргох. 17
Electronic proximity switch:	\checkmark
Safety temperature limiter:	\checkmark
Safety cut-out sensor:	\checkmark
Integrated mounting plate:	\checkmark
Anti-theft cover plate:	\checkmark
Air intake grille suitable for vacuum cleaning:	\checkmark
Protection type:	IP 23
Weight with wall mount [kg]:	3.0
Dimensions (height × width × depth) [cm]:	30.4 × 26.8 × 18.2


Description

- > Comfort air hand dryer for wash-room facilities
- > Touchless on/off function
- > Low noise level: max. 69 dB (A)
- > Safety shut-off after approx. 35 seconds continuous use (e.g. in the event of chewing gum vandalism)
- > The impact-resistant ABS case and the quiet, no-maintenance motor ensure a long service life
- > Easy, maintenance-friendly wall installation with integrated mounting plate (without having to open the unit)
- > Connecting cable (~25cm)
- Connection terminal for fixed connection easily accessible by separate flap
- > Extremely economical operation
- > The air flow is heated by means of the waste heat from the engine in an energy-efficient manner
- > Air intake grille suitable for vacuum cleaning
- > Rating 1.0 kW 230 V (air flow: 38 l/s)

Cost comparison:


Drying systems in highly frequented sanitary rooms

(Source: IPI institute for product research and information GmbH, Esslingen, report no. 5051-07, 2007)




Warm air hand dryer **WHT** Installation




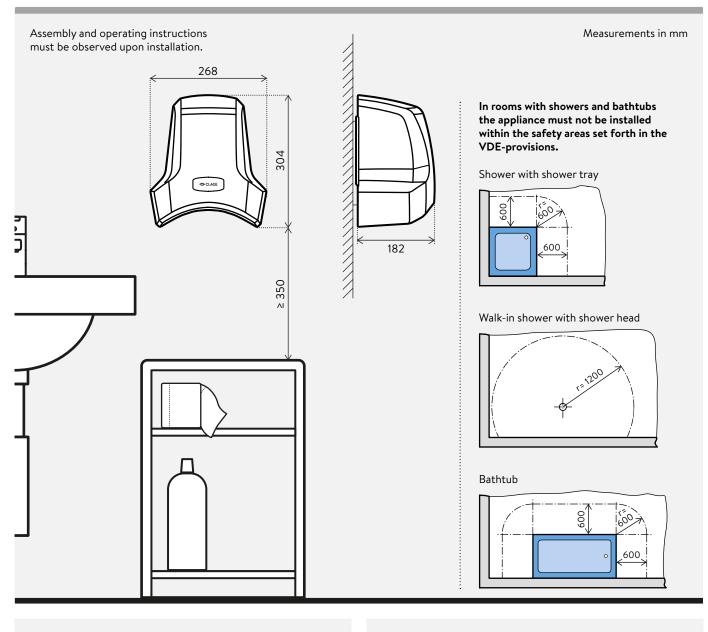

Connecting at surface or concealed wire



Connecting to an installed socket next to or behind the appliance



Subject to technical changes and version changes. Errors and omissions excepted. Date of publication: 08.17 CLAGE GmbH | Pirolweg 1 - 5 | 21337 Lüneburg | Germany | Phone +49 4131 8901-38 | Fax +49 4131 2444771 | export@clage.de > www.clage.com