

# Technical Data Sheet

CODE 11333

## MEX 120/5" LL 1S

Wall axial fans



### Certifications



IMQ



CE



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

Frequency (Hz)	50	Weight (Kg)	0,77
Insulation Class	II°	Max delivery at max speed (l/s)	48,6
IP	45	Max delivery at max speed (m <sup>3</sup> /h)	175
Max ambient temperature for continuous operation (°C)	50	Pressure max - max speed (mmH2O)	5
Max. absorbed Current at max. speed (A)	0,095	Pressure max - max speed (Pa)	49,04
Max. absorbed power at max speed (W)	13	RPM max	2075
Nominal Diameter (mm)	120	Sound power Lw [dB(A)] - max speed	52,8
Voltage (V)	220-240	Sound pressure level Lp in free field [dB(A)] 3 m max speed	32,3

### DIMENSIONS

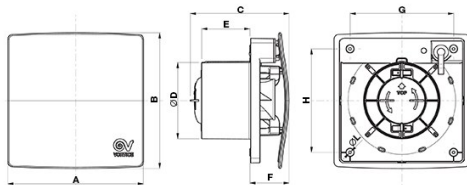

Size A (mm)	193
Size B (mm)	193
Size C (mm)	138
Size D (mm)	∅ 119
Size E (mm)	71
Size F (mm)	53
Size G (mm)	152
Size H (mm)	152
Size L (mm)	∅ 3,5

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 11333

## MEX 120/5" LL 1S

Wall axial fans



---

### DESCRIPTION

- Housings made of shockproof and UV resistant white ABS.
- Nominal diameter 120 mm.
- AC motor equipped with long-life ball-bearings, mixed-flow impellers made of PP resistant to aggressive substances.
- Maximum air flow 175 m<sup>3</sup>/h.
- Integrated butterfly back-draught shutter designed to prevent unwanted air inflows when the appliance is switched-off.
- Protection rating IP45, suitable for installation in Zone 1 of bathrooms, as defined by international standard IEC 60364-7.
- IMQ safety certification.

### CURVES

□

#### PER INFORMAZIONI:

**Servizio al Cliente:** tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

**Pre & Post Vendita:** fax +39 02 90699302

**Email prevendita:** [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)