

# Technical Data Sheet

CODE 12452

## VORTICE 230/9" AR

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



C Tick Mark



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

|  |            |                                     |         |
|--|------------|-------------------------------------|---------|
| Absorbed Current max (A)                                   | 0,13       | Voltage (V)                         | 220-240 |
| Absorbed Power max (W)                                     | 26         | Weight (Kg)                         | 3,45    |
| Frequency (Hz)   | 50-60      | Delivery max - Extract (l/s)        | 133     |
| Inlet  | Automatico | Delivery max - Extract (m3/h)       | 480     |
| Insulation Class   | II°        | Delivery max - Intake (l/s)         | 86      |
| IP   | X4         | Delivery max - Intake (m3/h)        | 310     |
| Max absorbed Power at 60Hz (W)                             | 26         | Delivery max (m³/h)                 | 480     |
| Max ambient temperature for continuous operation (°C)      | 50         | RPM                                 | 790     |
| Max ambient temperature for continuous operation 60Hz (°C) | 50         | Rpm - Exhaust                       | 790     |
| Ø Discharge Hole (mm)                                      | 230        | Rpm - Supply                        | 1080    |
|  |            | Sound Pressure level Lp [dB (A)] 3m | 35,6    |

### DIMENSIONS

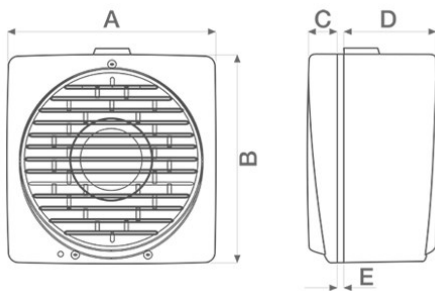

|              |         |
|--------------|---------|
| Ø glass hole | 257/262 |
| Ø wall hole  | 257/262 |
| Size A (mm)  | 294     |
| Size B (mm)  | 297     |
| Size C (mm)  | 31      |
| Size D (mm)  | 130     |
| Size E (mm)  | 2/38    |

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

# Technical Data Sheet

CODE 12452

## VORTICE 230/9" AR

Wall/window axial fans




### DESCRIPTION

- Model designed for window/wall mounted installation.
- Reversibility function (intake or extraction).
- Automatic shutter: prevents the entry of cold air and bad smells when the appliance is switched off.
- Material: UV resistant ABS plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 230 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

□

### ACCESSORIES



#### KIT TE 230/9" (TORRETTA)

Code 13002



#### KIT SA 230/9" (SCHERMO ANTILUCE)

Code 13004



#### KIT MU (MURO)

Code 13018



#### KIT VV 230/9" (DOPPI VETRI)

Code 13022



#### KIT FF 230/9" (DOPPIA FINESTRA)

Code 13025



#### CR5N

Code 12941




#### CREN

Code 12944



#### C PIR

Code 12998



#### C TIMER

Code 12999



#### C TEMP

Code 12992



#### C SMOKE

Code 12993



#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

**C HCS**

Code 12994



**KIT TC 230/9"**  
**(TETTO CON**  
**CONDOTTO)**

Code 13028